

COREtec[®]
the Original



Extra long planks
with high-end performance

XL-END

EN

IT - ES - PT



YOUR CORETEC® FLOOR, MADE WITH CARE

We have a passion for providing a wide selection of authentic natural looks, so you can express what makes you, you. Persistent in product innovation – including micro-beveled edges, enhanced painted bevels & Embossed in Register technology – we create the most appealing designs & textures available.

When choosing a floor from this collection, you choose for a warm atmosphere and a powerful look. The exceptionally long planks are no less than **2.10 meters long** and **15 mm thick**. Thanks to the extra thick wear layer of 0.8 mm, these classy floors score excellently in terms of wear and impact resistance.

AN EXTRA THICK NATURAL BACKING

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors. And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

A natural solution that brings only benefits to your home or business:



Added sound insulation



A comfortable and warmer floor



A natural protection against mold and mildew




No need for separate underlayment



Absorbs subfloor imperfections



EXTRA LONG, EXTRA STRONG

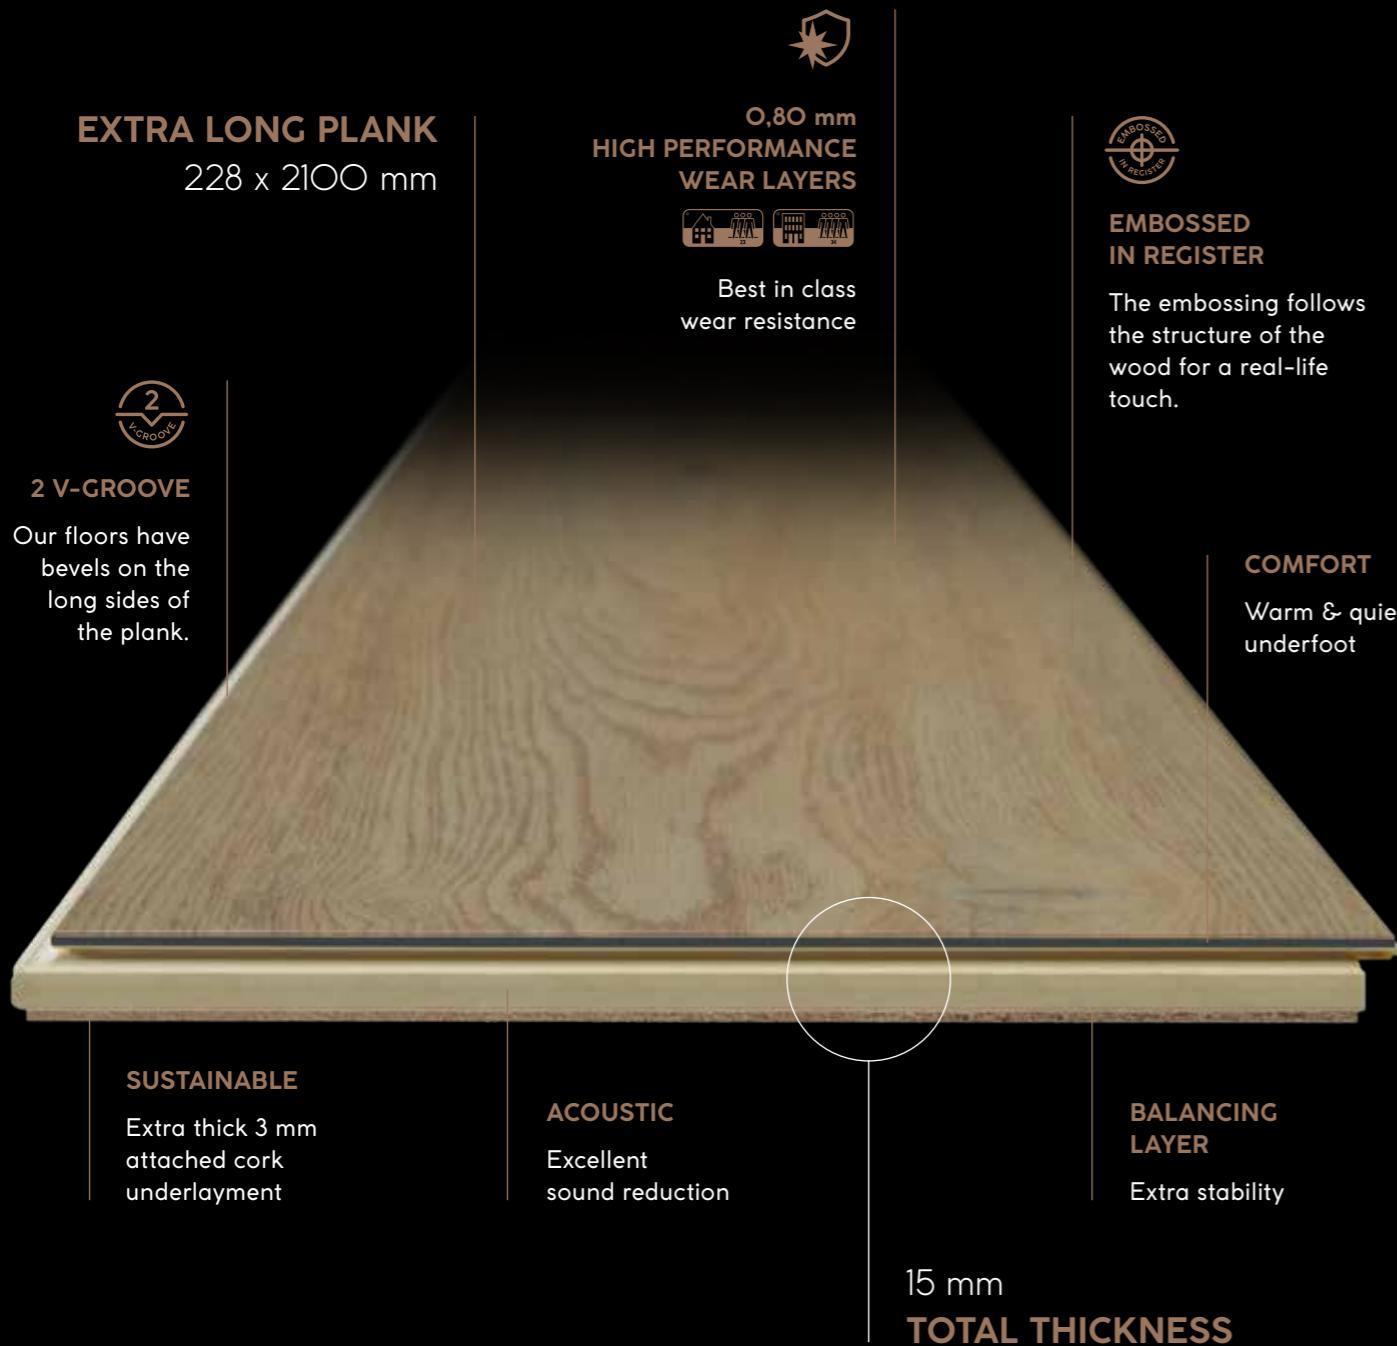

EXTRA LONG PLANK
228 x 2100 mm


**0,80 mm
HIGH PERFORMANCE
WEAR LAYERS**
 
Best in class
wear resistance



**EMBOSSED
IN REGISTER**
The embossing follows
the structure of the
wood for a real-life
touch.

COMFORT
Warm & quiet
underfoot



2 V-GROOVE
Our floors have
bevels on the
long sides of
the plank.

SUSTAINABLE
Extra thick 3 mm
attached cork
underlayment

ACOUSTIC
Excellent
sound reduction

**BALANCING
LAYER**
Extra stability

15 mm
TOTAL THICKNESS



**Best in class
wear resistance**

Eccellente resistenza all'usura / La mejor
resistencia al desgaste de su categoría /
Resistência ao desgaste topo de gama



100% waterproof

100% Resistente all'acqua /
100% resistente al agua /
100% à prova d'água



Easy to install

Facile da installare / Fácil de instalar /
Fácil de instalar



Electrostatic performance

Performance elettrostatica /
Antiestático / Anti-estático



Extremely stable

Estremamente stabile / Extremadamente
estable / Extremamente estável



Reduces noise

Riduce il rumore / Reducción de ruido /
Amortecimento acústico



**No acclimatisation
necessary**

Non necessita di acclimatazione /
No necesita aclimatación /
Não precisa de aclimação



Pet proof

Ideale per chi ha animali domestici /
A prueba de mascotas /
À prova de animais domésticos



**Installation on
any surface**

Può essere installato su ogni superficie
esistente / Instalación sobre cualquier
superficie / Instalação em qualquer
superfície




**Ideal for underfloor
heating & cooling**

Adatto a riscaldamento a pavimento
e raffreddamento / Conveniente para
calefacción y refrigeración por suelo
radiante / Adequado para arrefecimento
e aquecimento por piso radiante



AN EXCLUSIVE WATERPROOF SELECTION



CHANTILLY
50 LVREXL 2599



BELVOIR
50 LVREXL 2594




MONTCLAIR
50 LVREXL 2557




EGMONT
50 LVREXL 2553



KANTARA
50 LVREXL 2515



WINDSOR
50 LVREXL 2683



FONTENEAU
50 LVREXL 2686



CHANTILLY

50 LVREXL 2599

XL-END







BELVOIR
50 LVREXL 2594

XL-END






MONTCLAIR

50 LVREXL 2557

XL-END

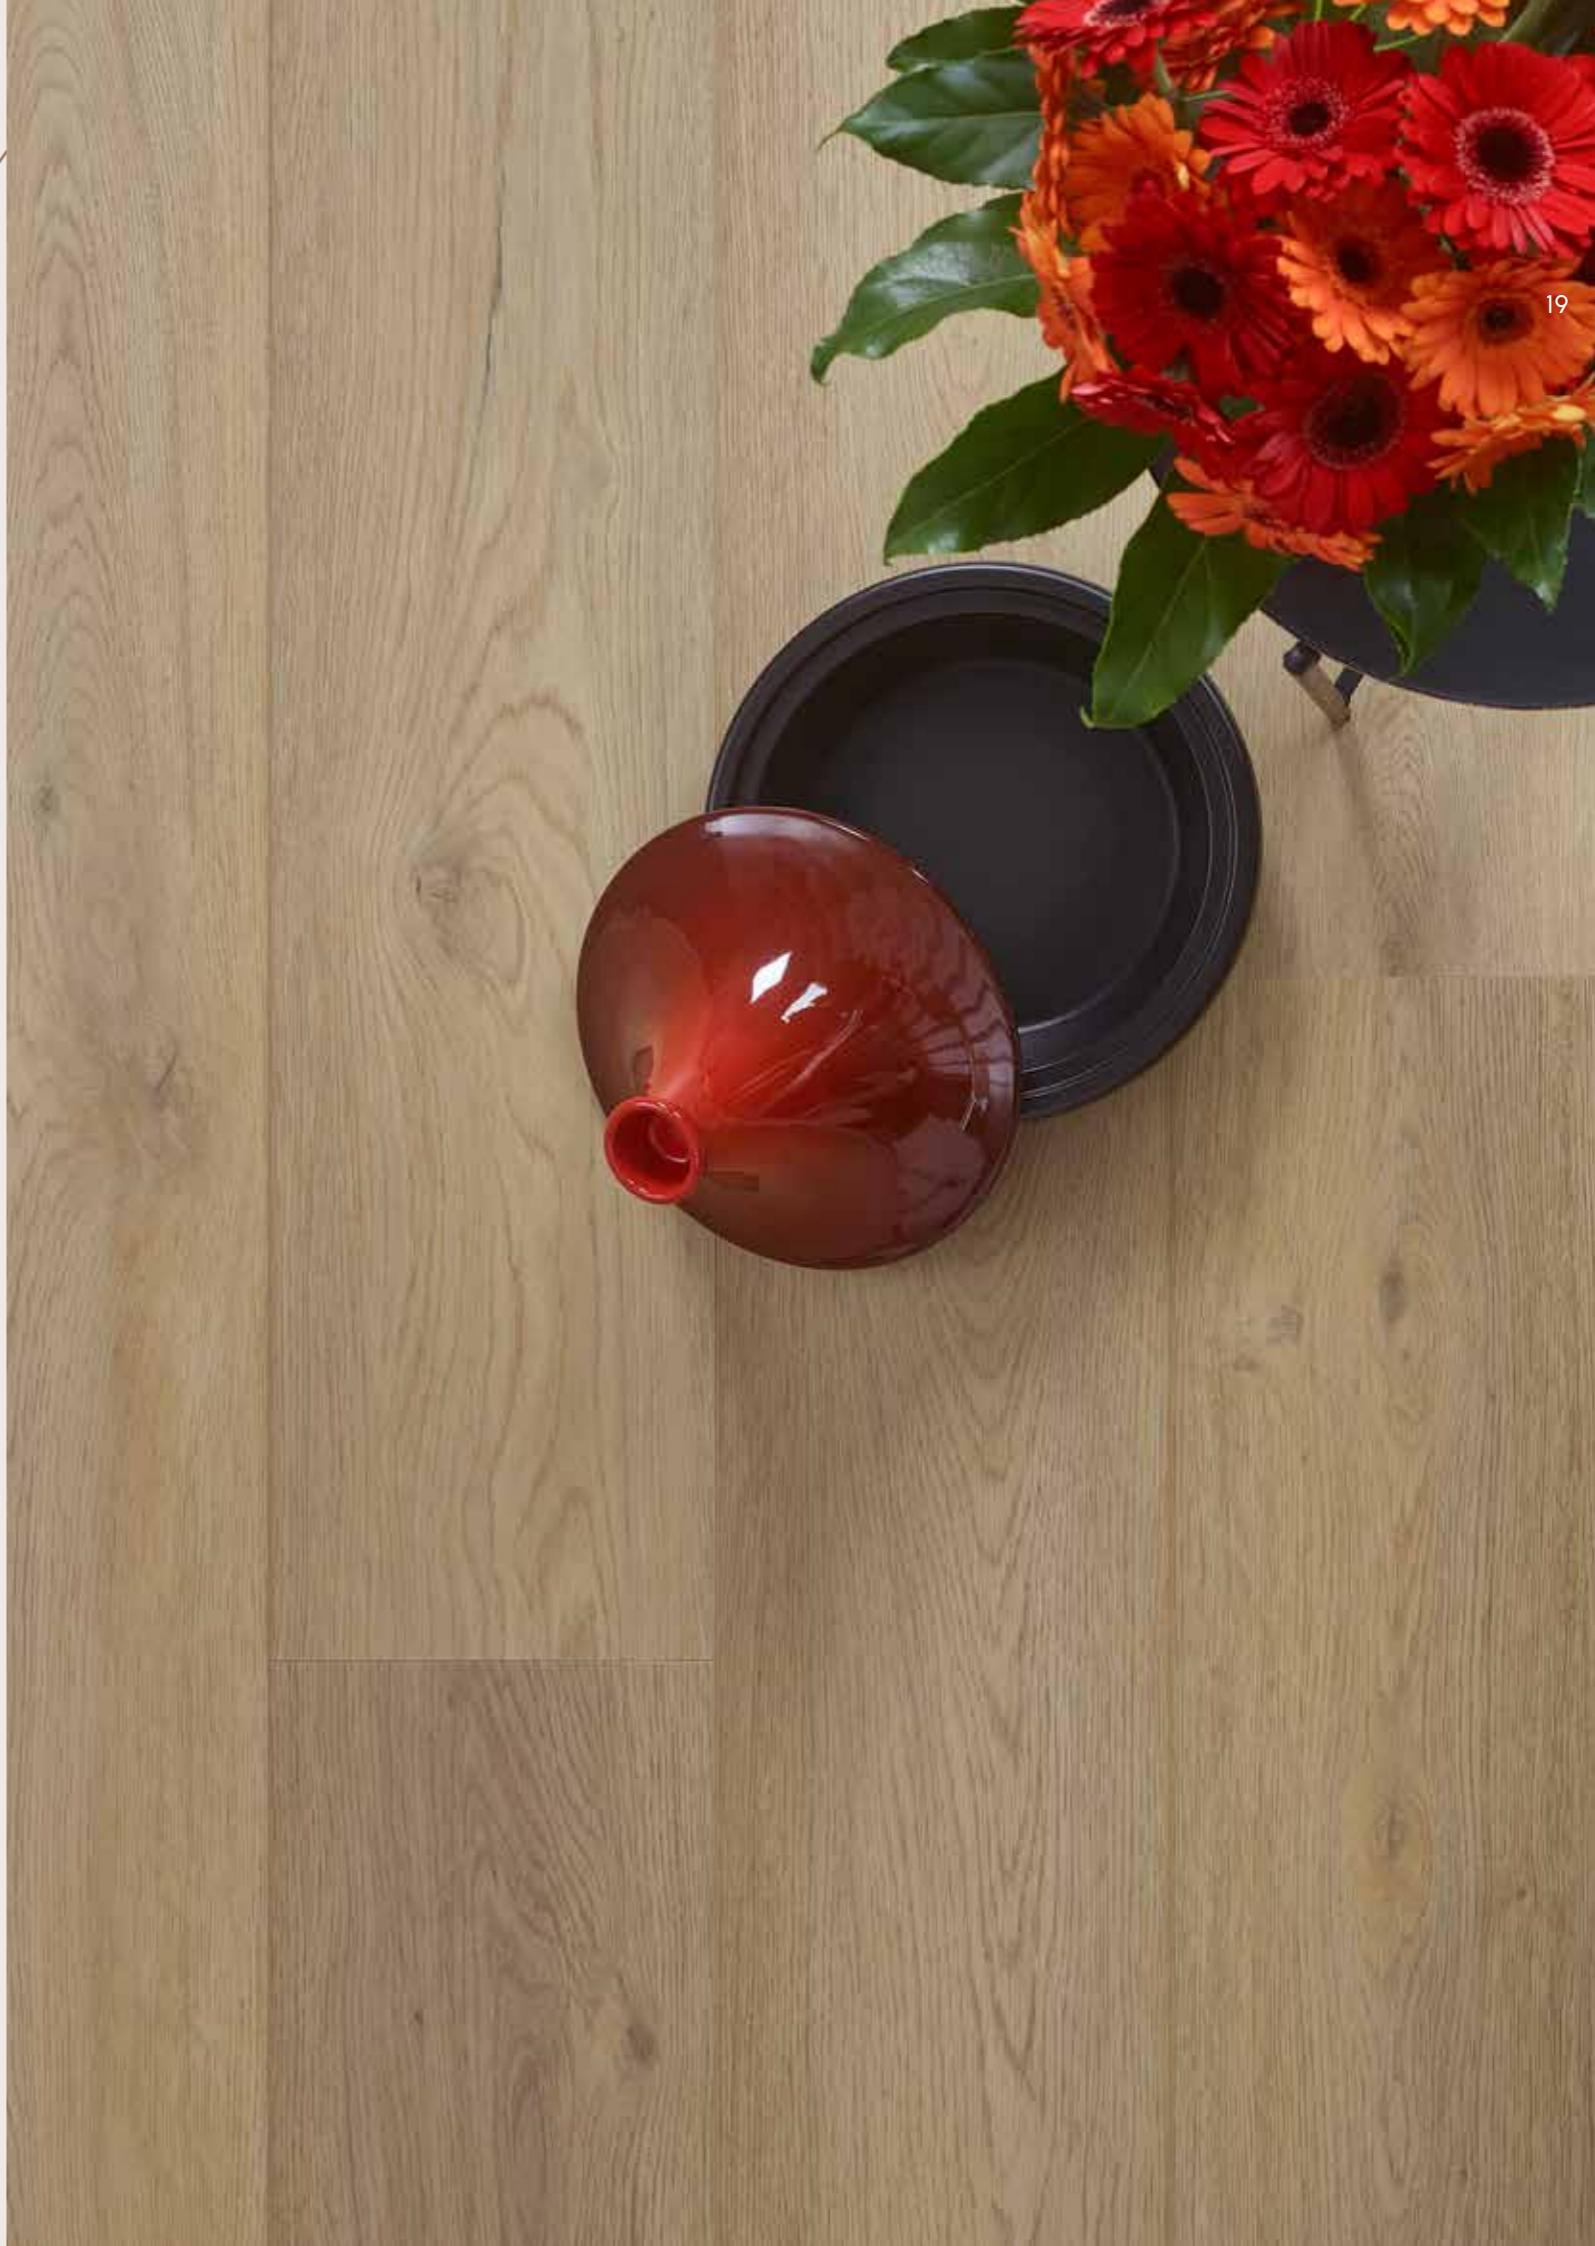





EGMONT

50 LVREXL 2553

XL-END





KANTARA

50 LVREXL 2515

XL-END







WINDSOR

50 LVREXL 2683

XL-END






FONTENEAU

50 LVREXL 2686

XL-END

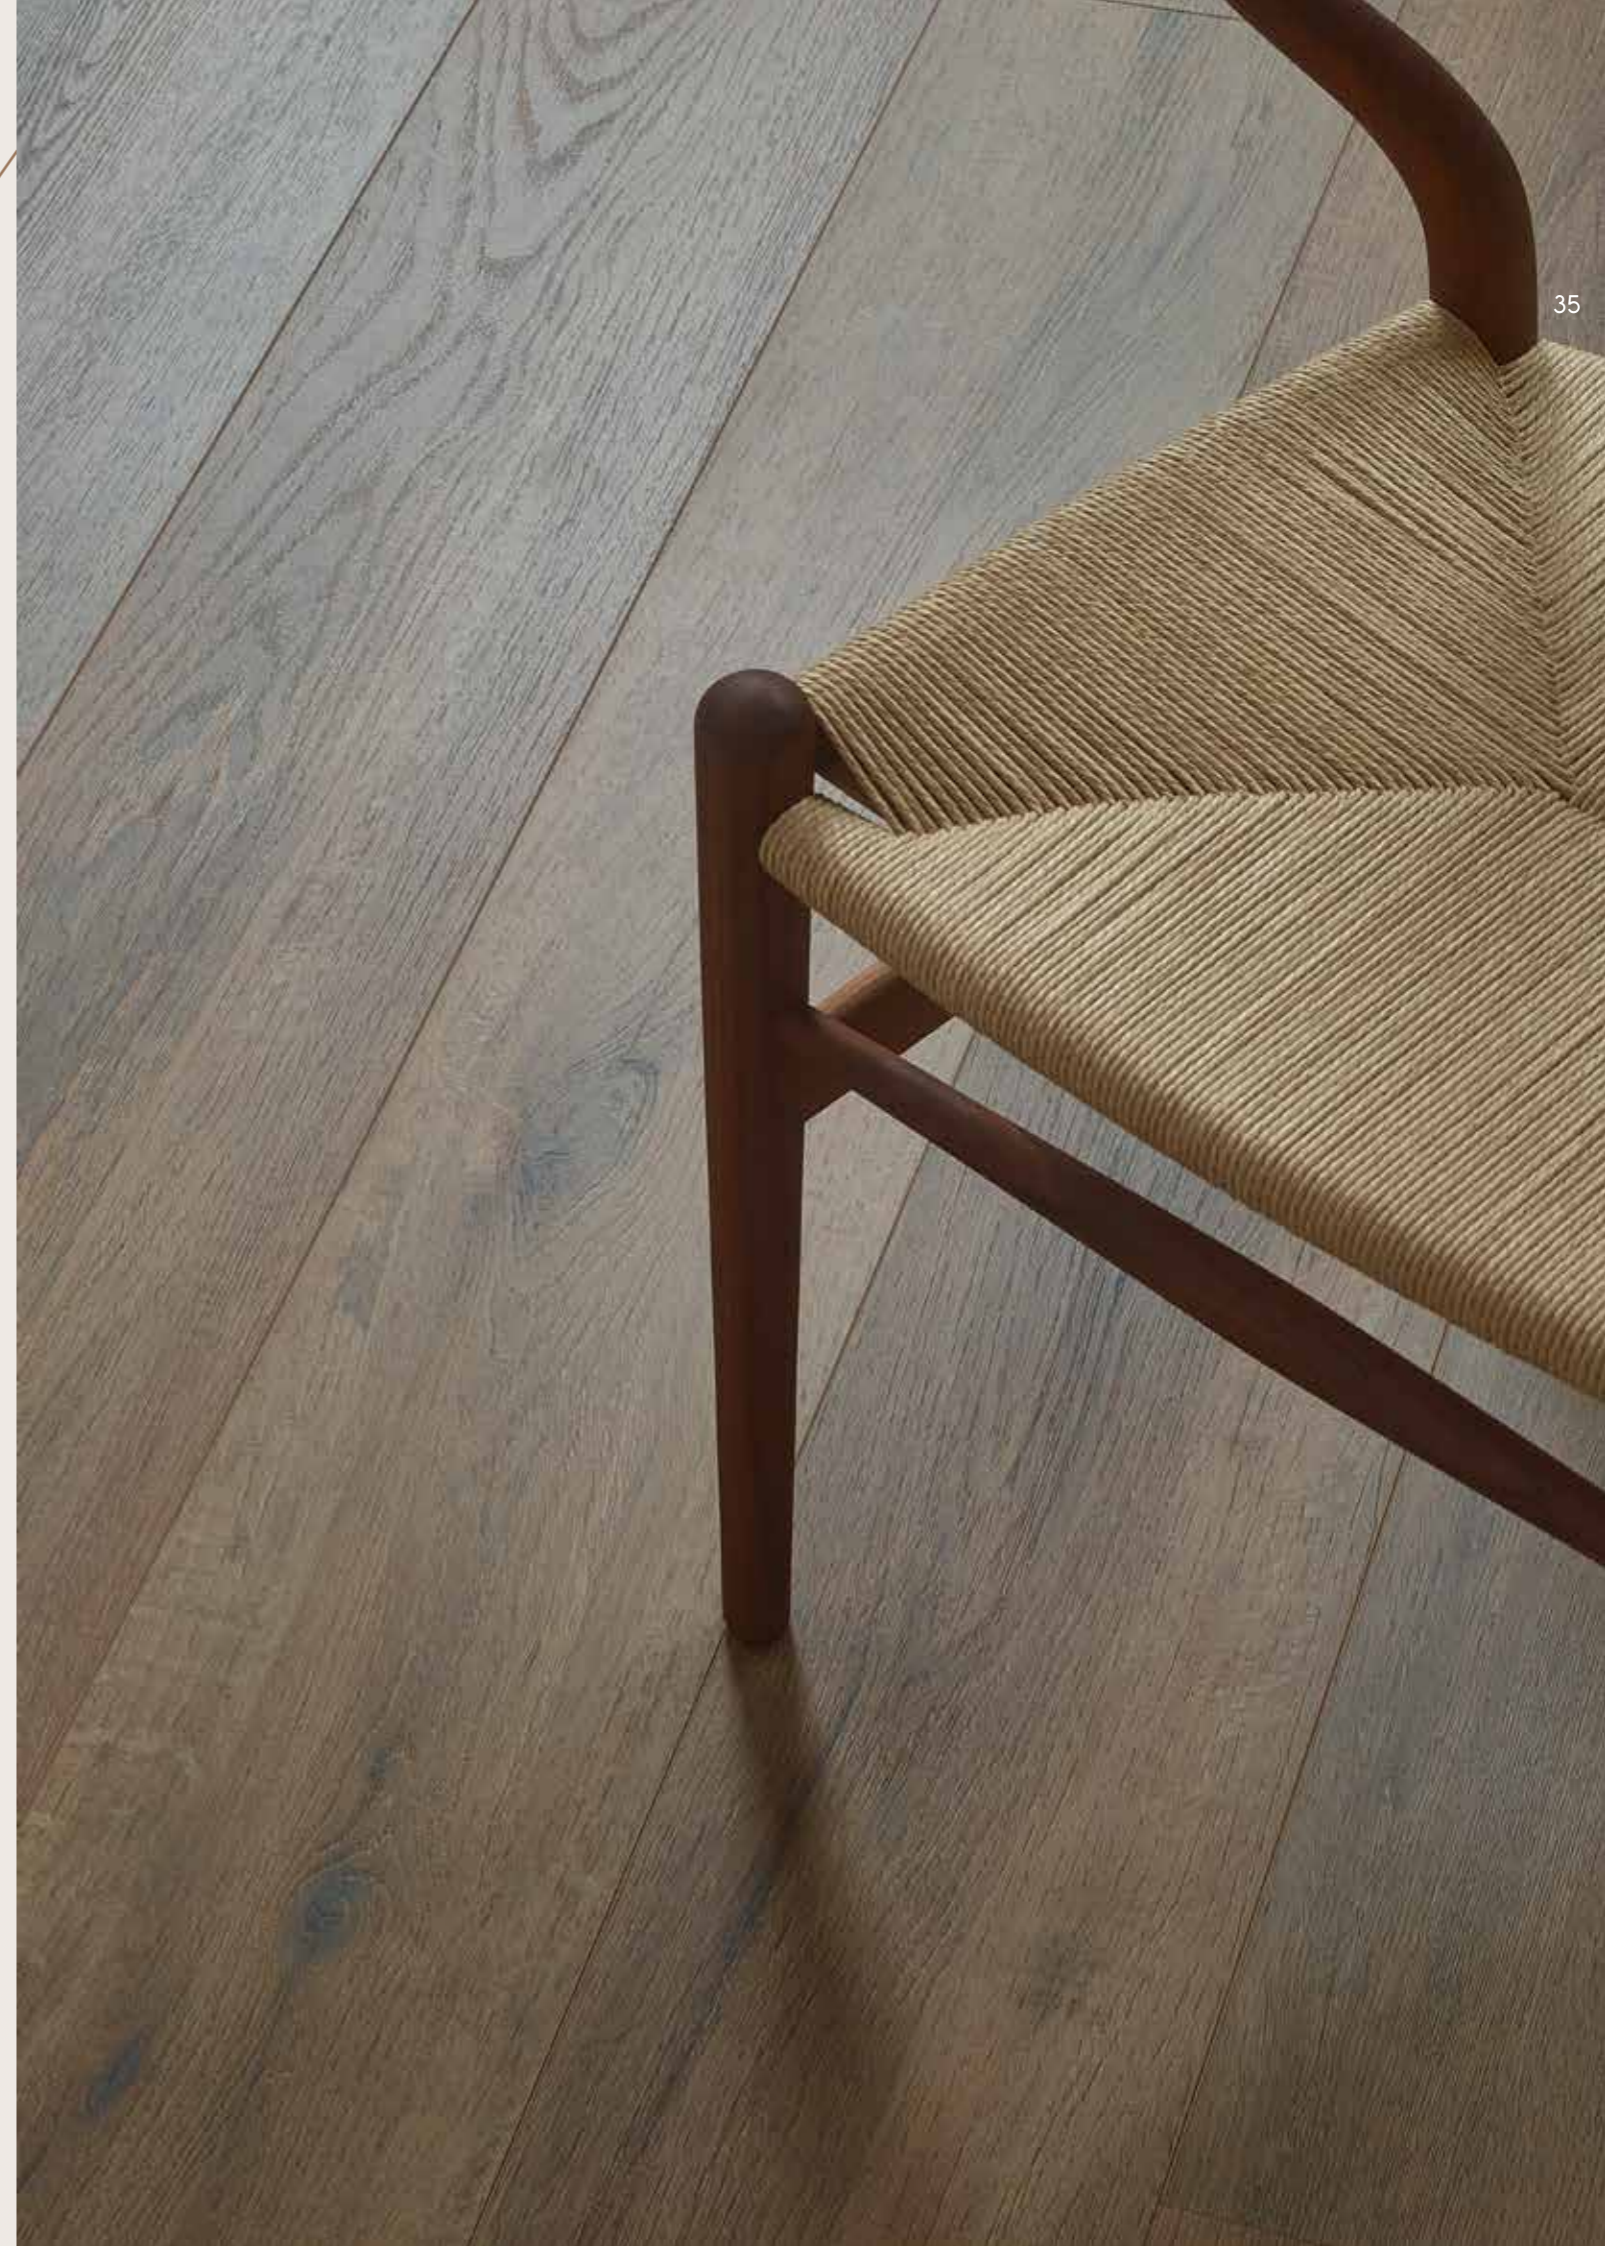




Accessories

Paintable skirtings


Our paintable skirtings are 100% waterproof & shock resistant.




14 cm 1.8 cm 2 m
7OPSK2000-1




10 cm 1.3 cm 2.3 m
7OPSK2300-3



10 cm 2 cm 2 m
7OPSK2000-2




6.5 cm 1.3 cm 2.3 m
7OPSK2300-2




4 cm 1 cm 2.3 m
7OPSK2300-1

Matching design accessories


Our design accessories match the design of your floor & are also 100% waterproof & shock resistant.




8 cm 1.5 cm 2.4 m
7OHD8




5.8 cm 1.3 cm 2.4 m
7OMD8



1.8 cm 1.8 cm 2.4 m
7OQR8



2 cm 4.2 cm 2.4 m
7OMP8




! = Matching design reference

Installation

Easy installation

COREtec® floors have the easiest install on the market.

Watch our installation video on our website.
www.coretecfloors.com

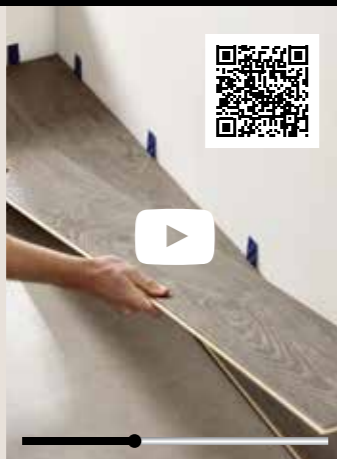

Maintenance

The COREtec® Clean, quick & green kit:

- Daily cleaner
- Deep cleaner
- Stain remover



XL-END

EASY TO INSTALL
& EFFORTLESS
MAINTENANCE



COREtec® floors are
that good, somebody else
can re-*enjoy* it.

At COREtec® Floors, we attach great importance to sustainability. Recycling our multilayer, multicomponent material has a high energy cost, which means that a circular solution with re-use of the flooring is more appropriate. That's why we come up with an environmentally friendly solution: to set up Second Life floors, based on infinite re-use, an approach which is unique in our sector.

As the architects of multilayer waterproof rigid flooring, we are the first manufacturers to set up a take-back service, giving used flooring a new lease of life. These Second Life floors will initially be offered to charitable bodies and youth organisations. Our new service also has a societal dimension, as the business we call on to clean the used flooring employs people with complex barriers to work. They will use specially developed ecologically friendly COREtec® products to clean the dismantled flooring, making the old flooring look as good as new.

Thanks to Second Life, your old floor gets a real second chance. And therefore you also contribute to a more sustainable world!



Technical specifications

42



15 mm



0,80 mm



228 x 2100 mm



3 pcs
1,44 m²
21,9 kg

LEVEL OF USE

Classe d'uso / Clasificación de uso / Classe de utilização
23 / 34 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS

Fantasia geometriche / Características geométricas / Características geométricas
Compliant (ISO 24337)

WEAR RESISTANCE

Resistenza all'usura / Resistencia al desgaste / Resistência ao desgaste
Pass 7000 cycles
(EN 13329 Annex E)

CASTOR CHAIR RESISTANCE

Resistenza alle sedie con ruote / Resistencia a sillas con ruedas / Resistência a cadeira de rodas
Pass 25000 cycles (ISO 4918)

EFFECT OF FURNITURE LEG

Effeto furniture leg / Efecto de la pata de un mueble / Efeito da perna do móvel
No visible change (EN 16581)

RESIDUAL INDENTATION

Indentazione residua certificata / Huella residual / Recuo Residual
≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING

Resistenza alle macchie / Resistencia al manchado / Resistência a manchas
5 (no visible change) (EN 438-2)

LOCKING STRENGTH

Chiusura perfetta con sistema a click / Resistencia a la tracción / Força de encaixe
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

DIMENSIONAL STABILITY

Stabilità dimensionale / Estabilidad dimensional / Estabilidade dimensional
Pass ≤ 0.25% (EN ISO 23999)

COLOUR FASTNESS TO LIGHT

Resistencia alla luce / Solidez del color a luz artificial / Resistência da cor à luz
> grade 6 (ISO 105-B02)

IMPACT SOUND REDUCTION

Isolamento acustico / Aislamiento acústico / Isolamento acústico
 $\Delta L_w = 20$ dB (ISO 10140-3 / EN 717-2)

FORMALDEHYDE EMISSION CLASS

Classe Formaldeide / Emisión formaldehído / Classificação formaldeído
E1 (EN 717-1)

FIRE CLASSIFICATION

Klasifikácia Classe di resistenza al fuoco / Resistencia al fuego / Classificação de Fogo
Bfl - S1 (EN 13501)

SLIP RESISTANCE

Coefficiente dinamico di attrito / Coeficiente de fricción / Coeficiente de atrito
DS - RIO (EN 13893 - DIN 51130)

UNDERFLOOR HEATING

Riscaldamento a pavimento / Calefacción por suelo radiante / Aquecimento por piso radiante
Suitable


ELECTROSTATIC PERFORMANCE

Performance elettrostatica / Rendimiento antiestático / Acumulação de cargas eletrostáticas
≤ 2 kV (EN 1815)

THERMAL RESISTANCE

Resistencia al calore / Aislamiento térmico / Isolamento térmico
0.1099 m²-K/W (EN 12667)

43

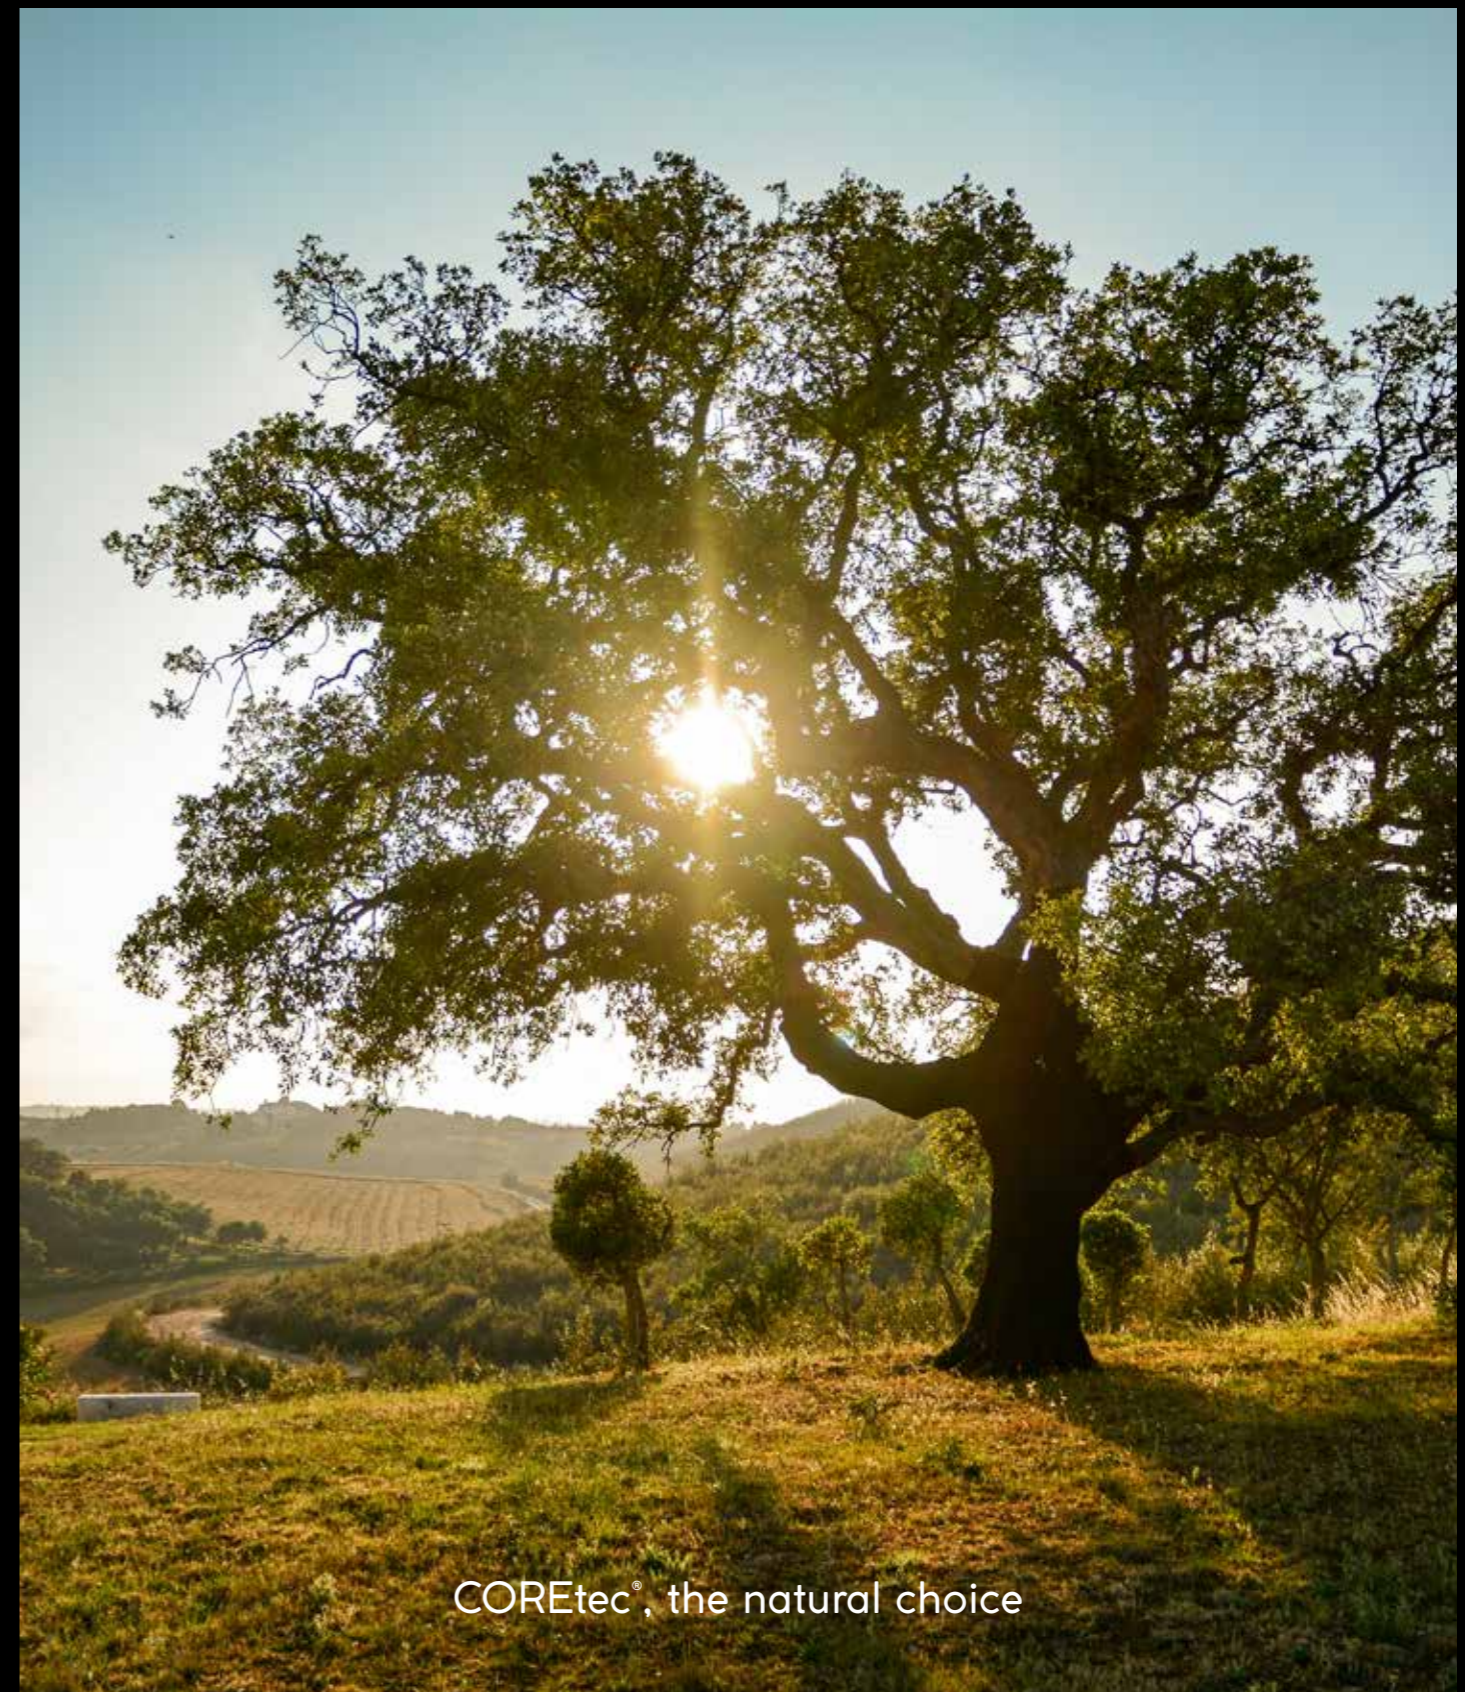

COREtec®, the natural choice



LIFETIME
WARRANTY
RESIDENTIAL



10 YEAR
WARRANTY
COMMERCIAL



US PATENT
APPROVED
9,156,233



30-YEAR
LIFE FLOOR
COREtec QUALITY



EN 14041
CE
DOP-ELV
USFLOORS Int. Bc.
Temmerman 20
8790 WAREGEM
Belgium
suitable floor covering



GREENGUARD
PRODUCT CERTIFIED FOR
LOW CHEMICAL EMISSIONS
UL/COM/CC
UL 2818
GOLD



AgBB
EMISION CLASS FOR RESIN
M1



DIBt
abZ-Z-156.610-1695



E1
HCHO



DIPHALATE FREE
LEAD FREE
SOUND
core
BY COREtec

Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.

COREtec[®]
FLOORS



Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be · www.coretecfloors.com